

# 18LX60V2/S

LOW FREQUENCY TRANSDUCER
LX60 Series

## **KEY FEATURES**

- High power handling: 700 W<sub>AES</sub>
- High sensitivity: 98 dB (1W / 1m)
- · FEA optimized magnetic circuit
- CONEX spider for higher resistance and consistency
- Weatherproof cone with treatment for both sides of the cone
- 4" DUO double layer in/out voice coil
- Extended controlled displacement: X<sub>max</sub> ± 9 mm
- 47 mm peak-to-peak excursion before damage





## **TECHNICAL SPECIFICATIONS**

460 n	nm 18 iı
	2 8
	6,4 0
	700 W <sub>AES</sub>
	1.400 V
98 dB	1W / 1m @ Z <sub>l</sub>
	25 - 1.000 H
	$V_{b} = 250$
	$F_{b} = 35 \text{ Hz}$
101,6	mm 4 iı
	21,8 N/A
	0,215 kg
	20 mn
	10 mn
	47 mn
	98 dB

### THIELE-SMALL PARAMETERS 3

35 Hz
5,1 Ω
15,7
0,5
0,48
236 I
$94,5~\mu m$ / $N$
3,1 kg / s
1,9 %
$0,132 \text{ m}^2$
8 mm
1056 cm <sup>3</sup>
2,1 mH

#### Notes

Nameland diameter

<sup>&</sup>lt;sup>1</sup> The power capaticty is determined according to AES2-1984 (r2003) standard.

<sup>&</sup>lt;sup>2</sup> Program power is defined as power capacity + 3 dB.


<sup>&</sup>lt;sup>3</sup> T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $<sup>^4</sup>$  The  $\rm X_{max}$  is calculated as  $\rm (L_{vc}$  -  $\rm H_{ag})/2$  +  $\rm (H_{ag}/3.5)$ , where  $\rm L_{vc}$  is the voice coil length and  $\rm H_{ag}$  is the air gap height.



# 18LX60V2/S

LOW FREQUENCY TRANSDUCER
LX60 Series

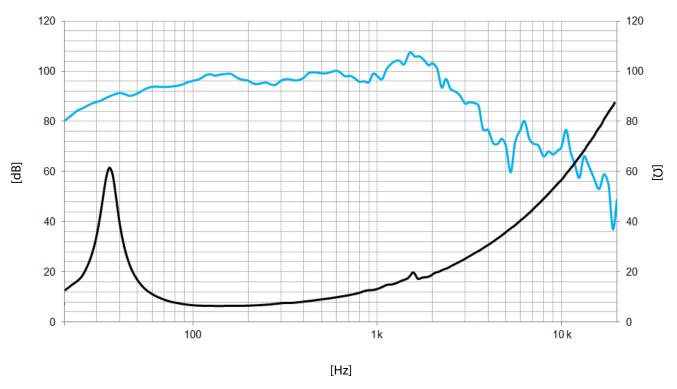

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

## **MOUNTING INFORMATION**

461 mm 18,2 in **Overall diameter** 438 mm 17,2 in **Bolt circle diameter** Baffle cutout diameter: 415 mm 16,4 in - Front mount Depth 193 mm 7,6in 11,2 kg 25,8 lb Net weight **Shipping weight** 12,5 kg 27,5 lb

## **DIMENSION DRAWING**

