

KEY FEATURES

- 1,4" (36 mm) high frequency compression driver
- 1,75" (44,4 mm) voice coil diameter
- 140 W program power above 1,2 kHz
- Sensitivity: 110 dB (1W / 1m)
- PM-4 polymer diaphragm
- Ultra lightweight edgewound aluminium voice coil
- Aluminium cover
- Ferrite magnet



TECHNICAL SPECIFICATIONS

Nominal diameter	36 mm	1,4 in
Rated impedance		8 Ω
Minimum impedance		5,2 Ω
D.C. resistance		4,3 Ω
Power capacity ¹	70 W _{AES} above 1,2 kHz	
Program power ²	140 W above 1,2 kHz	
Sensitivity ³	110 dB 1W / 1m @ Z _N	coupled to TD-365


Frequency range		0,7 - 19 kHz
Recommended crossover		1,2 kHz or higher (12 dB/oct min.)
Voice coil diameter	44,4 mm	1,75 in
Magnetic assembly weight	1,2 kg	2,86 lb
Flux density		1,65 T
BI factor		6,6 N/A

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.

² Program power is defined as the transducer's ability to handle normal music program material.

³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 1 - 7 kHz

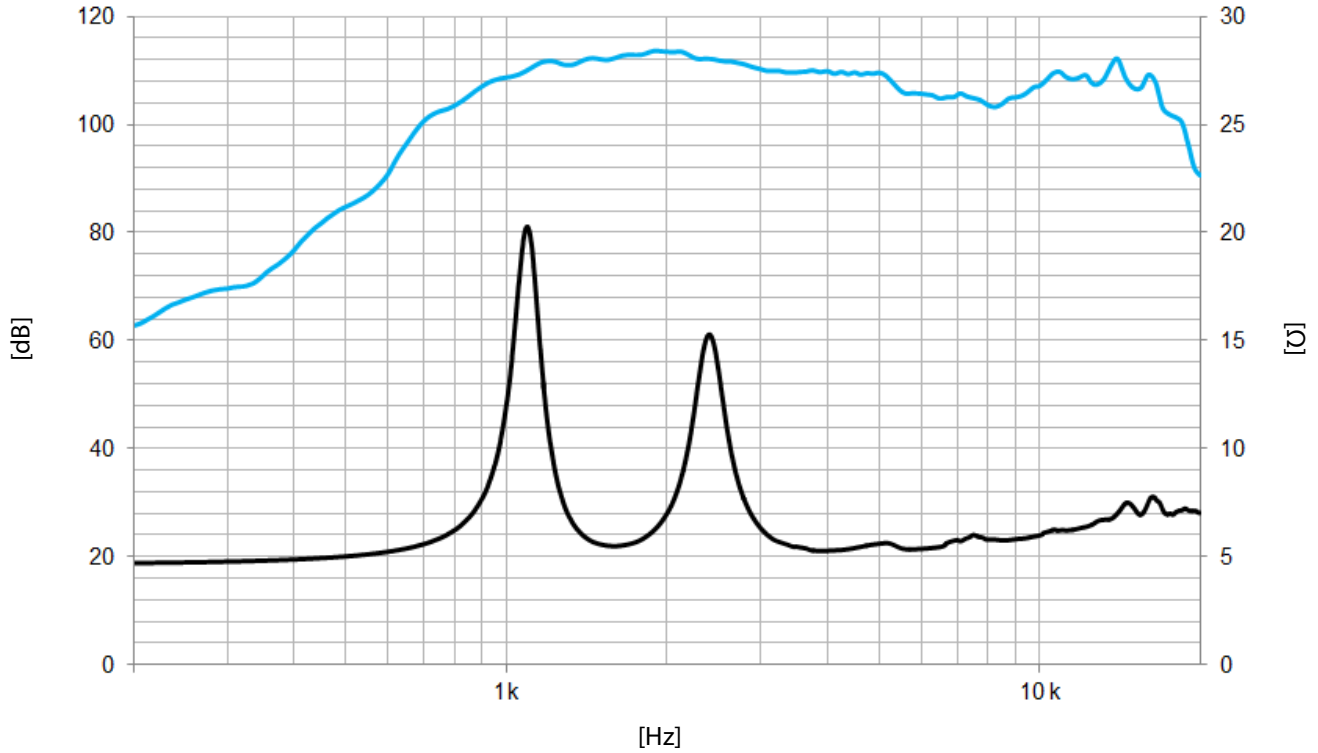

Note: On axis frequency response measured coupled to TD-365 horn in anechoic chamber, 1W / 1m

MOUNTING INFORMATION

Overall diameter	120 mm	4,7 in
Depth	66 mm	2,6 in
Mounting	Four M5 threaded holes, 90° apart on 101,6 mm (4 in) diameter circle	
Net weight	2 kg	4,4 lb
Shipping weight	2,7 kg	5,9 lb

DIMENSION DRAWING

