

# 18PW1400Fe/S

**LOW FREQUENCY TRANSDUCER** 



- High power handling: 1.400 WAES
- Exclusive Malt Cross® Technology Cooling System
- Low power compression losses
- High sensitivity: 98 dB (1W / 1m)
- · FEA optimized ferrite magnetic circuit
- · Optimized non-linear parameters

- Weatherproof cone with treatment for both sides of the cone
- 4" DUO double layer in/out copper voice coil
- · Aluminium demodulating ring
- Extended controlled displacement: X<sub>max</sub> ± 10 mm
- 55 mm peak-to-peak excursion before damage





# **TECHNICAL SPECIFICATIONS**

Nominal diameter	460 mm	18 in
Rated impedance		8 Ω
Minimum impedance		5,3 Ω
Power capacity <sup>1</sup>	1.400 W <sub>AES</sub>	
Program power <sup>2</sup>		2.800 W
Sensitivity	98 dB 1W /	1m @ Z <sub>N</sub>
Frequency range	25 -	1.800 Hz
Recom. enclosure	\	/ <sub>b</sub> = 180 I
(Bass-reflex design)	F	<sub>b</sub> = 42 Hz
Voice coil diameter	101,6 mm	4 in
BI factor		29 N/A
Moving mass		0,230 kg
Voice coil length		25 mm
Air gap height		12 mm
X <sub>damage</sub> (peak to peak)		55 mm

### THIELE-SMALL PARAMETERS 3

Resonant frequency, f <sub>s</sub>	32 Hz
D.C. Voice coil resistance, R <sub>e</sub>	5,1 Ω
Mechanical Quality Factor, Q <sub>ms</sub>	10,2
Electrical Quality Factor, Qes	0,28
Total Quality Factor, Qts	0,27
Equivalent Air Volume to C <sub>ms</sub> , V <sub>as</sub>	228,9 I
Mechanical Compliance, C <sub>ms</sub>	103 μm / N
Mechanical Resistance, R <sub>ms</sub>	4,6 kg / s
Efficiency, $\eta_0$	2,7 %
Effective Surface Area, S <sub>d</sub>	0,1255 m <sup>2</sup>
Maximum Displacement, X <sub>max</sub> <sup>4</sup>	10 mm
Displacement Volume, V <sub>d</sub>	1251 cm <sup>3</sup>
Voice Coil Inductance, Le	1,2 mH

### Notes

<sup>&</sup>lt;sup>1</sup> The power capaticty is determined according to AES2-1984 (r2003) standard.

<sup>&</sup>lt;sup>2</sup> Program power is defined as power capacity + 3 dB.


<sup>3</sup> T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $<sup>^4</sup>$  The X<sub>max</sub> is calculated as (L<sub>vc</sub> - H<sub>ag</sub>)/2 + (H<sub>ag</sub>/3,5), where L<sub>vc</sub> is the voice coil length and H<sub>ag</sub> is the air gap height.



# 18PW1400Fe/S

**LOW FREQUENCY TRANSDUCER** 

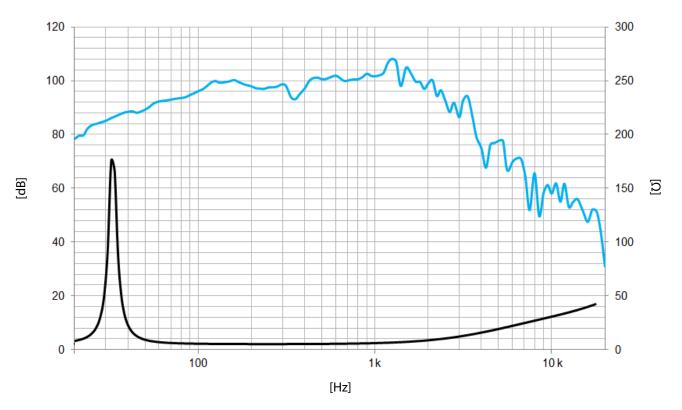

Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

# **MOUNTING INFORMATION**

Overall diameter	461 mm	18,1 in
Bolt circle diameter	438 mm	17,2 in
Baffle cutout diameter:		
- Front mount	415 mm	16,4 in
Depth	206,5 mm	8,1 in
Net weight	16,9 kg	37,3 lb
Shipping weight	18,2 kg	40,1 lb

# **DIMENSION DRAWING**

