


TW 26 TDF

FERROFLUIDCOOLED VERSION OF TW 26 T SOFT DOME TWEETER

Ferrofluid helps this tweeter to handle large amount of power without coil overheating while keeping distortion at lower level.

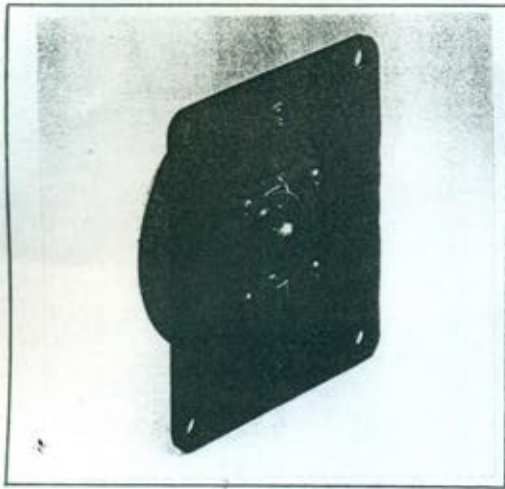

Nominal impedance	:	8 Ω
Sensitivity 2.8V / 1m.	:	90 dB
Power handling	:	150 W Program > 4000Hz
Magnet / size	:	Ferrite / alu 88 mm
Voice coil diameter	:	Copper / 26 mm
Voice coil former	:	Alu
Cone / surround	:	Coated fabric
Mounting holes	:	6 mm X 4
Weight	:	0.85 Kg

