


## Ribbon Microphone Transformer LL2911

**Turns ratio:** 1 + 1 + 1 + 1 : 37  
**Dims: (Length x Width x Height above PCB (mm))** 30 x 22.5 x 14.5  
**Pin Layout** (viewed from component side) **and winding schematic:**



**Spacing between pins:** 2.54 mm (0.1")  
**Spacing between rows of pins:** 22.86 mm (0.9")  
**Weight:** 27 g  
**Rec. PCB hole diameter:** 1.5 mm  
**Housing:** Mu metal  
**Core:** Amorphous strip core  
**Static resistance of each primary (average):** 0.2 Ω  
**Static resistance of secondary:** 59 Ω

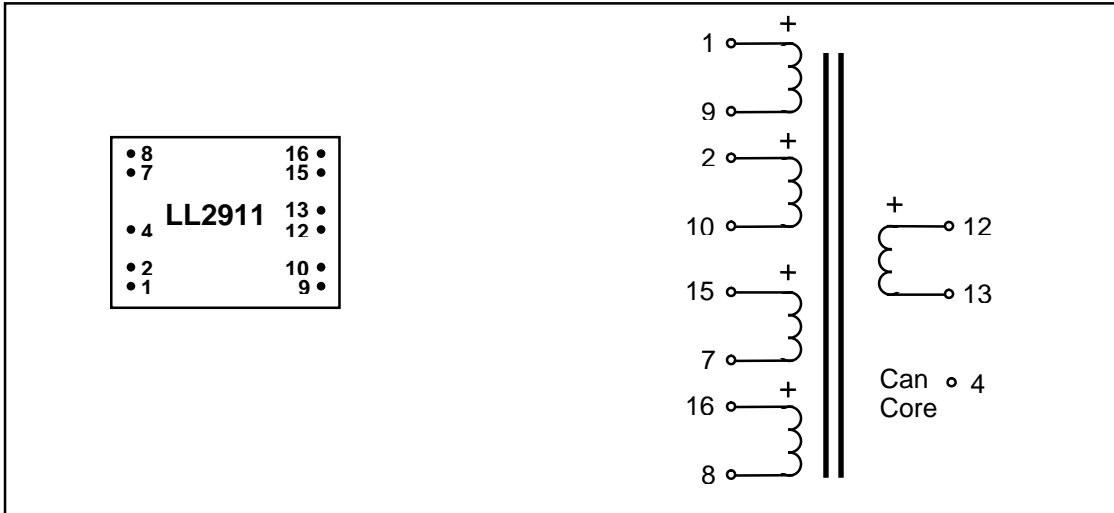