

GENERAL CHARACTERISTICS

| | | |
|-----------------------------------|------|----|
| Nominal Overall Diameter | 207 | mm |
| Nominal Voice Coil Diameter | 25 | mm |
| Magnet Weight | 200 | g |
| Flux Density | 0.96 | T |

THIELE-SMALL PARAMETERS


| | | | |
|------------------------------------|--------------|-------|-----------------|
| Voice Coil DC Resistance | R_E | 3.00 | Ω |
| Resonance Frequency | f_s | 129.0 | Hz |
| Mechanical Q Factor | Q_{MS} | 8.67 | |
| Electrical Q Factor | Q_{ES} | 1.72 | |
| Total Q Factor | Q_{TS} | 1.43 | |
| Mechanical Moving Mass | M_{MS} | 9.3 | g |
| Mechanical Compliance | C_{MS} | 164.0 | μm/N |
| Force Factor | $B \times l$ | 3.72 | Wb/m |
| Equivalent Acoustic Volume | V_{AS} | 10.5 | lt. |
| Maximum Linear Displacement ... | X_{MAX} | 1.00 | mm |
| Reference Efficiency | η_0 | 1.27 | % |
| Diaphragm Area | S_D | 213.8 | cm ² |
| Losses Electrical Resistance | R_{ES} | 16.0 | Ω |
| Voice Coil Inductance @ 1kHz | L_E | 0.21 | mH |

CONSTRUCTIVE CHARACTERISTICS


| | |
|--------------------------|---------------------|
| Magnet | AlNiCo |
| Voice Coil Winding | Copper |
| Voice Coil Former | Kapton |
| Cone | Paper |
| Surround | Integrated Paper |
| Dust Dome | Treated Cloth |
| Basket | Pressed Sheet Steel |

ELECTRICAL CHARACTERISTICS

| | | |
|---|------|----|
| Nominal Impedance | 4 | Ω |
| Rated Power (DIN 45573 - IEC 268.5) | 25 | W |
| Musical Power (DIN 45500) | 50 | W |
| Sensitivity @ 1 W, 1 m | 94.1 | dB |

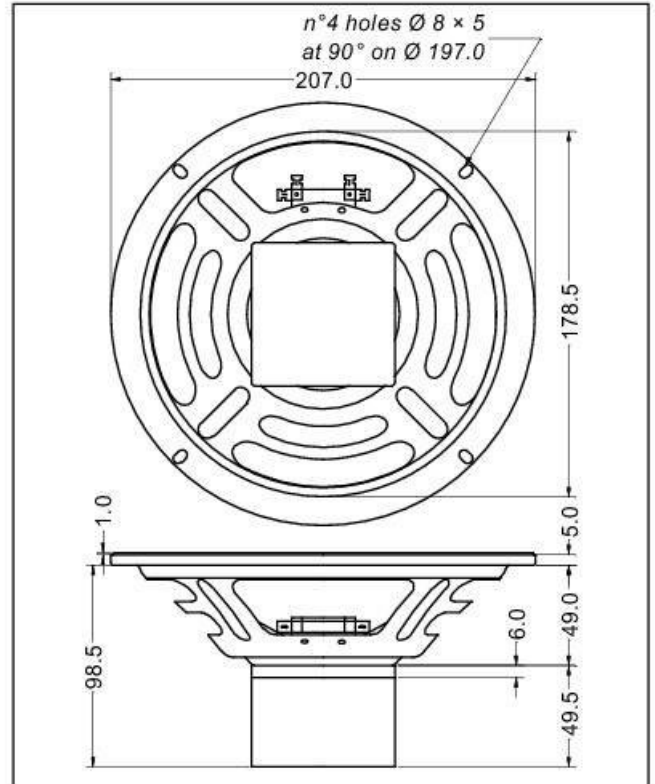

Frequency Response on IEC Baffle (DIN 45575) @ 1 W, 1 m - Impedance

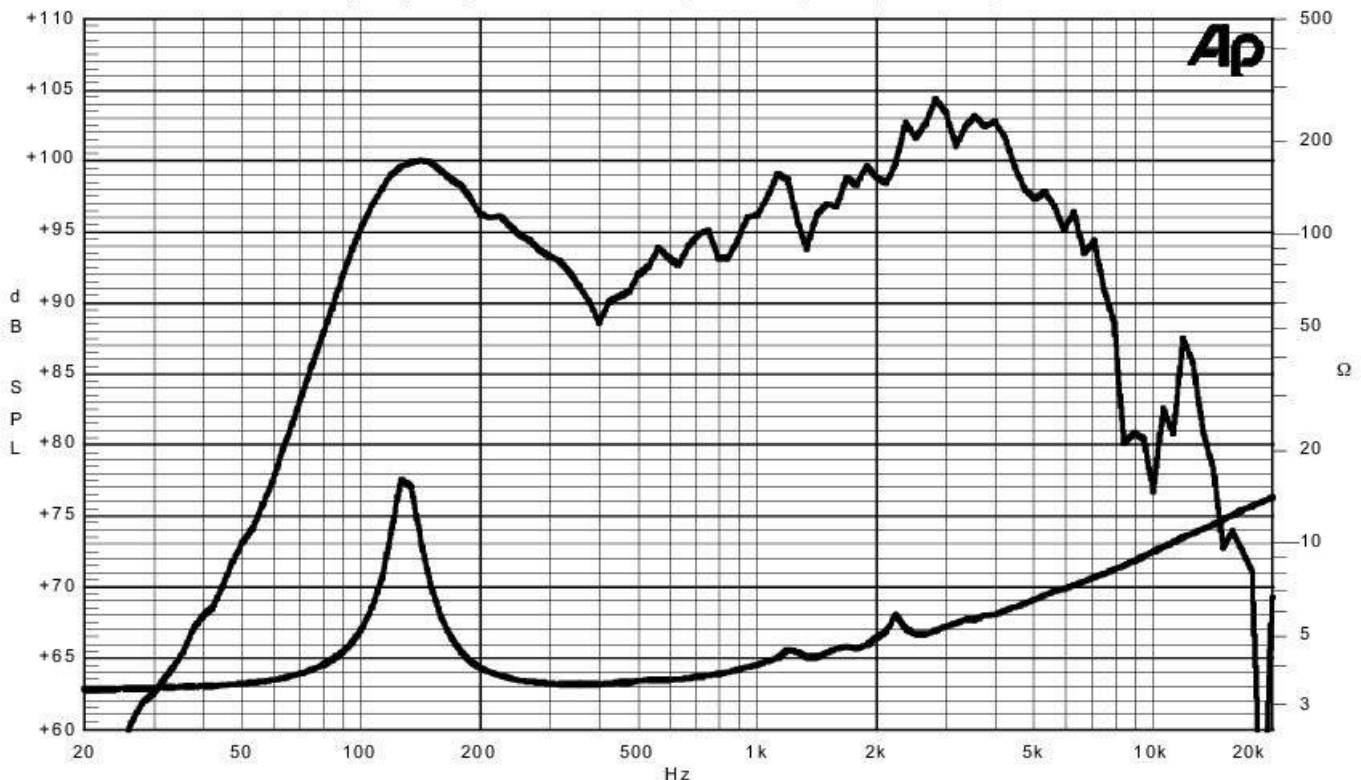

Due to continuing product improvement, the features and the design are subject to change without notice.

27/01/2000