



# PowerSlim6 Integra

## Ultra Slim Mid-woofer

Ø 6", Ø 2.1" voicecoil, 4Ω

### SPECIFICATIONS

#### General Data

Overall Dimensions	<b>DxH</b>	160mm x 16.7mm(6.3" x 0.65")
Nominal Power Handling (DIN)	<b>P</b>	80 watt
Transient Power 10ms		160 watt
Sensitivity 2.83V/1M		87 dB SPL
Frequency Response		See graph
Cone Material		Carbon sandwich 3 layer cone
Net Weight	<b>Kg</b>	0.47

#### Electrical Data

Nominal Impedance	<b>Z</b>	4Ω	8Ω
DC Resistance	<b>Re</b>	2.95Ω	
Voice Coil Inductance @ 1KHz	<b>LBM</b>	0.27mH	

#### Voice Coil and Magnet Parameters

Voice Coil Diameter	<b>DIA</b>	54mm
Voice Coil Height		9.5mm
HE Magnetic Gap Height	<b>HE</b>	4mm
Max. Linear Excursion	<b>X</b>	Mechanical ±6.5mm / Elec. ± 2.75mm
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		Neodymium Vented
B Flux Density	<b>B</b>	0.7 T
BL Product	<b>BXL</b>	4.24T


#### T-S Parameters

Suspension Compliance	<b>Cms</b>	0.35 mm/N	
Mechanical Q Factor	<b>Qms</b>	3.16	2.21
Electrical Q Factor	<b>Qes</b>	0.98	2.27
Total Q Factor	<b>Qts</b>	0.75	1.12
Mechanical Resistance	<b>Rms</b>	1.88 ΩM	
Moving Mass	<b>Mms</b>	12.46 g	
Eq. Cas Air Load (liters)	<b>VAS</b>	6.27 L	
Resonant Frequency	<b>Fs</b>	75 Hz	853 Hz
Effective Piston Area	<b>SD</b>	113 cm <sup>2</sup>	

#### FEATURES


- ▶ Ultra Shallow Profile
- ▶ 2.1" Large Hexatech™ Aluminum voice coil
- ▶ Neodymium Magnet System
- ▶ High power handling
- ▶ 3 layer Carbon Cone with rohacell

#### UNIT DIMENSIONS

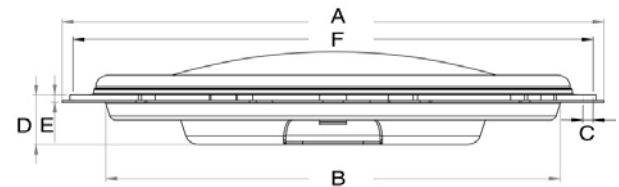


A - Overall diameter	160mm
B - Cut out diameter	134mm
C - Flange thickness	1.3mm
D - Overall height	33.4mm
E - Basket depth	14.1mm
F - Mounting holes location diameter	154mm
G - 4 Mounting holes, at 90° interval, inner hole diameter	Ø 3 mm

Impedance vs Freq

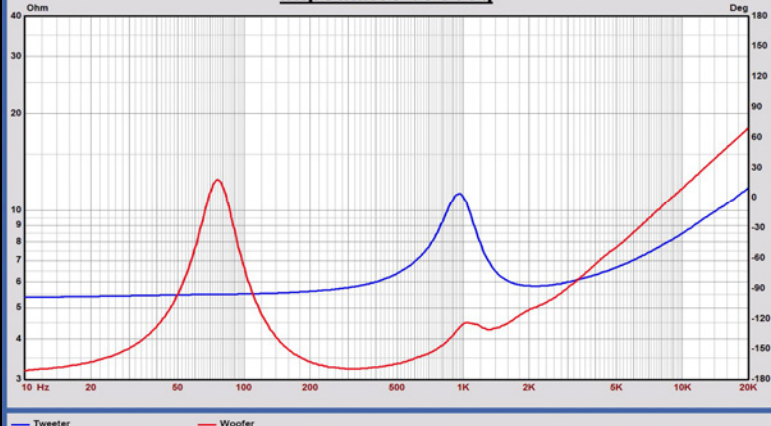

SPL vs Freq

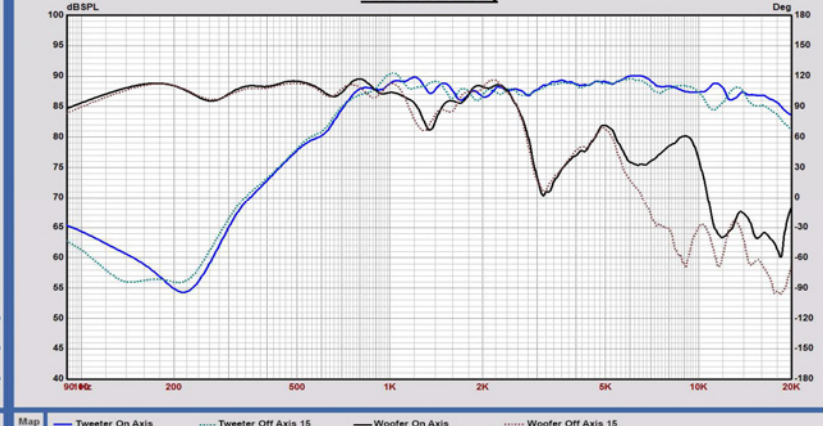

Driver is mounted rigidly in free air with no baffle or enclosure. Input signal is a stepped sinusoidal at 1VRMS. Impedance is measured using constant-voltage method.

Driver was mounted rigidly on an IEC baffle. Microphone distance is 0.5m, input voltage 2.83VRMS and normalized to 1m.