



Compact network CD receiver, containing myriad musical functions and a design that achieves high-quality sound

The Network CD Receiver SA-C600 brings you a wealth of music content with a single device—everything from records, CDs, and radio to music streaming and more—and a luxurious audio environment courtesy of Technics' superior sound engineering.



Key Features

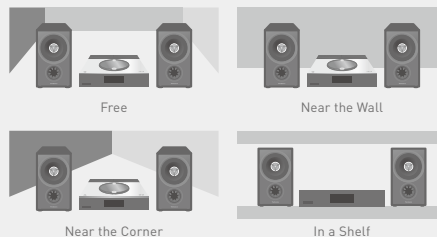

JENO Engine (Jitter Elimination and Noise-shaping Optimization)

In order to faithfully transmit the massive amount of audio data sent to the speakers without loss, the SA-C600 uses full digital amplification employing the JENO Engine. The JENO Engine transmits and processes audio with minimal jitter from the input stage to the power stage.

Space Tune™

Space Tune™ delivers optimized sound for your listening environment. This function includes 4 presets (Free, Near the Wall, Near the Corner and In a Shelf) for easy setting, and the L/R Custom feature allows users to enter separate settings for each individual speaker. The Technics Audio Center app also allows you to precisely adjust your sound.*

*Available for iOS devices only

Complete Compatibility

The SA-C600 supports a variety of music sources including CD, radio, phono input, optical digital input, coaxial digital input and USB input. It also supports a range of streaming services such as Spotify Connect®, TIDAL, Amazon Music, and more. You can also playback MQA-CD and MQA files with outstanding sound quality.

Premium Class Network CD Receiver

SA-C600



-Silver



-Black

Specifications

Output Power		60 W + 60 W (1 kHz, T.H.D. 1.0 %, 4 Ω, 20 kHz LPF)
FTC Output Power		40 W + 40 W (1 kHz, T.H.D. 1.0 %, 4 Ω, 20 kHz LPF)
Load Impedance		4 Ω - 16 Ω
Frequency Response	PHONO (MM)	20 Hz - 20 kHz [RIAA DEVIATION ±1 dB, 8 Ω]
	LINE	20 Hz - 80 kHz [-3 dB, 8 Ω]
	DIGITAL	20 Hz - 90 kHz [-3 dB, 8 Ω]
Input Sensitivity / Input Impedance	PHONO (MM)	2.5 mV / 47 kΩ
	LINE	200 mV / 22 kΩ
Analogue Input Terminal		PHONO (MM) ×1, LINE × 1
Digital Input Terminal		Optical Digital ×1, Coaxial Digital ×1, USB-A ×1, USB-B ×1 (PC)
Analogue Output Terminal		Sub Woofer ×1
Headphone Output		● (Stereo Ø3.5 mm)
Disc Compatibility		Audio CD, CD-R / CD-RW [CD-DA, Discs recorded and finalized on recording devices]
USB-A	iPod / iPhone / iPad	—
	Support Codec	WAV [32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24, 32 bit] FLAC [32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24 bit] DSD [2.8 MHz, 5.6 MHz, 11.2 MHz] AIFF [32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24, 32 bit] ALAC [32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24 bit] AAC [32, 44.1, 48, 88.2, 96 kHz / 16-320kbps] MP3 [32, 44.1, 48 kHz / 16-320 kbps]
PC (USB-B)	USB Audio Class Specification	USB 2.0 high-speed, USB Audio Class 2.0, Asynchronous mode
	Support Codec	LPCM [32, 44.1, 48, 88.2, 96, 176.4, 192 kHz / 16, 24 bit], DSD [2.8 MHz, 5.6 MHz]
	DSD Contol Mode	ASIO Native mode, DoP mode
MQA Decoder		●
LAN (DMR)	WAV	[32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24, 32 bit]
	FLAC	[32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24 bit]
	DSD	[2.8 MHz, 5.6 MHz, 11.2 MHz]
	AIFF	[32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24, 32 bit]
	ALAC	[32, 44.1, 48, 88.2, 96, 176.4, 192, 352.8, 384 kHz / 16, 24 bit]
	AAC	[32, 44.1, 48, 88.2, 96 kHz / 16-320kbps]
	MP3	[32, 44.1, 48 kHz / 16-320 kbps]
Ethernet Interface		LAN [100 Base-TX / 10 Base-T]
Wi-Fi		IEEE 802.11 a/b/g/n/ac, 2.4 GHz / 5 GHz Band
Chromecast built-in		●
AirPlay 2		●
Bluetooth® [Support codec]		● [AAC, SBC]
Tuner		FM
Power Supply		AC 120 V, 60 Hz
Power Consumption		46 W
Dimensions (W×H×D)		340 mm × 94 mm × 341 mm [13-25/64 × 3-45/64 × 13-7/16 inch]
Weight		Approx. 4.8 kg [Approx. 10.6 lbs]
Accessories		AC Cord, Remote Control, Batteries for Remote Control, Owner's Manual

Technics is a brand name of the Panasonic Corporation

Panasonic Consumer Electronics Company
 Division of Panasonic Corporation of North America
 Two Riverfront Plaza
 Newark, NJ 07102-5490
 (201) 348-7000

www.panasonic.com
www.technics.com

Design and specifications subject to change without notice.